

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELSNF66TB	2	TOP&BOT
ELSNF66M	2	MIDDLE

CAUTION

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

POWER REQ'TS

240 VOLTS

1 PHASE

60 HERTZ

15 AMPS


3600 WATTS

MAX TEMP 2300° F

WIRING NOTE

NOTE: ALL WIRES TO BE TYPE SEW/SF2, #14 AVG MINIMUM UNLESS NOTED

UL/CUL LISTED

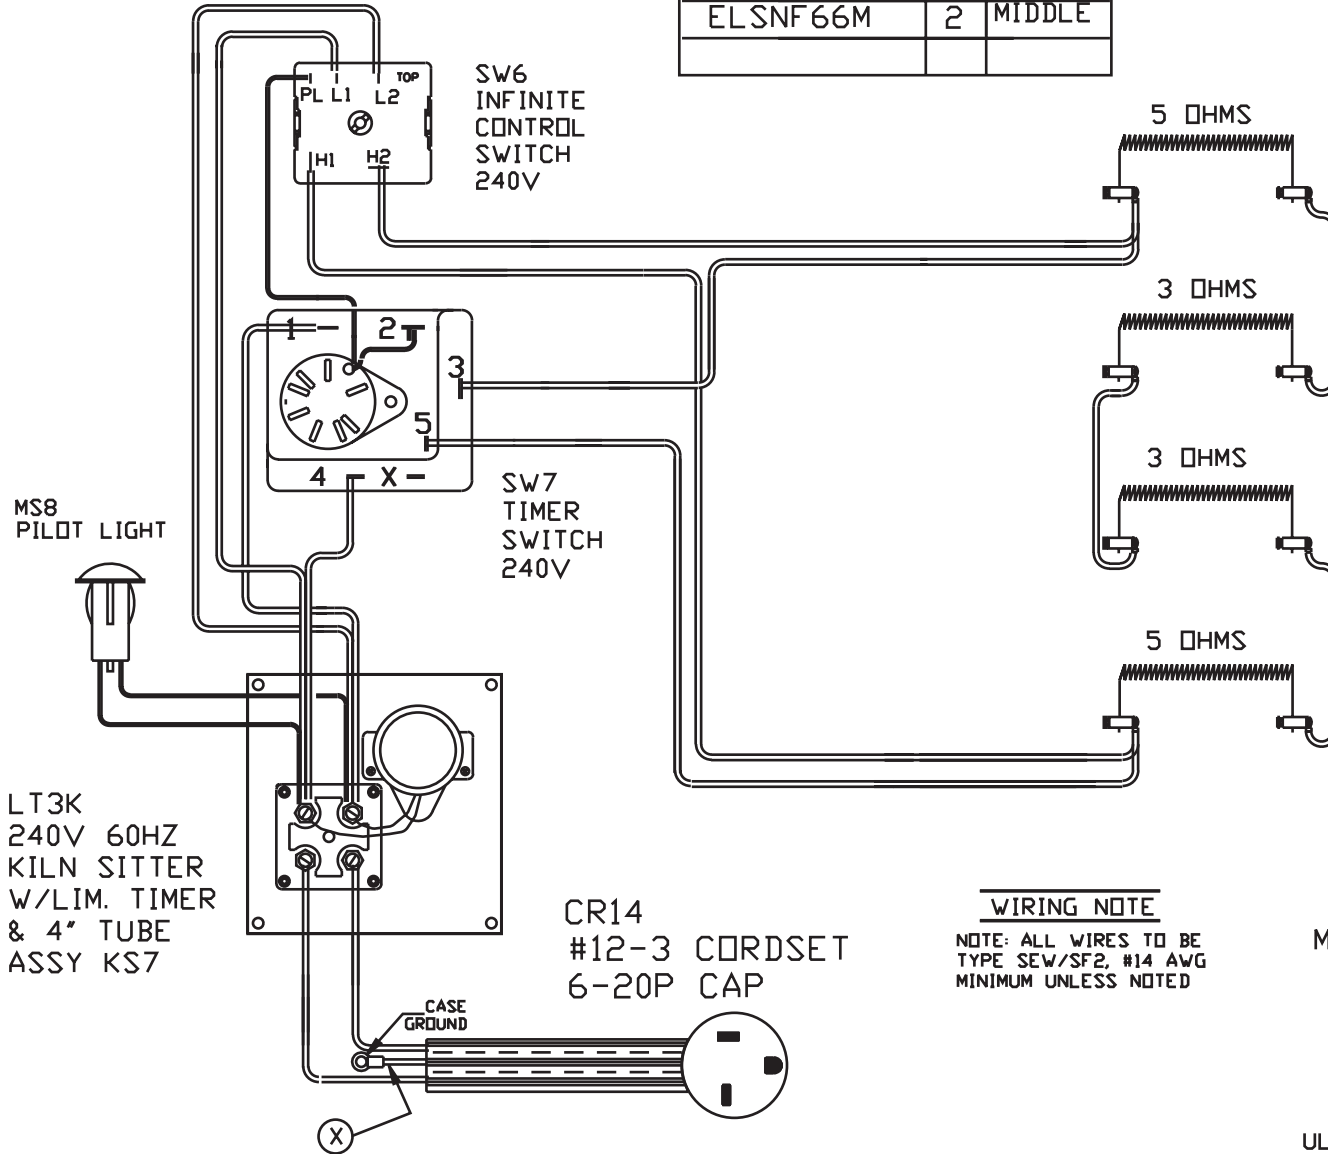

SW6
INFINITE
CONTROL
SWITCH
240V

SW7
TIMER
SWITCH
240V

MS8
PILOT LIGHT

LT3K
240V 60HZ
KILN SITTER
W/LIM. TIMER
& 4" TUBE
ASSY KS7

CR14
#12-3 CORDSET
6-20P CAP

(X)

COMMENTS

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

PRODUCT DESCRIPTION
7 SIDES, 14.5" DIA, 13.25" DP
240V, 1PH, 60HZ, 15A, 3600W

PART NO. SNF66

REV -

WIRING DIAGRAM