


**CAUTION**

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #100S

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

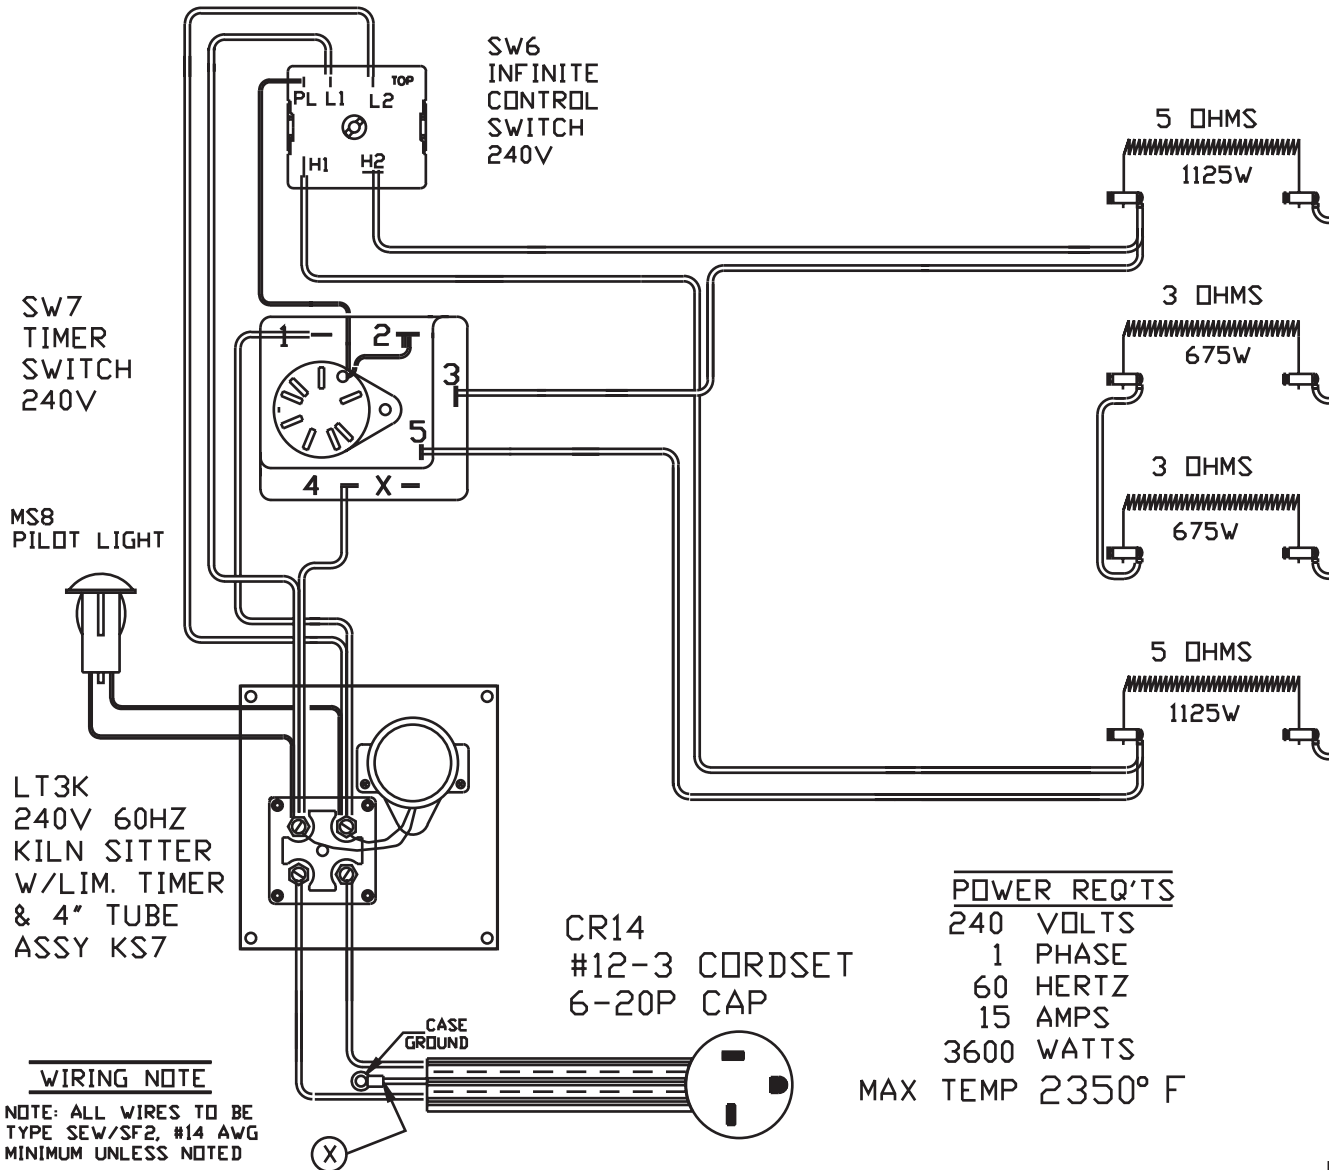

| TO RE-ORDER ELEMENTS, SPECIFY |     |         |
|-------------------------------|-----|---------|
| DESCRIPTION                   | QTY | LDC     |
| ELSNF663TB                    | 2   | TOP&BOT |
| ELSNF663M                     | 2   | MIDDLE  |
|                               |     |         |

**POWER REQ'TS**

240 VOLTS  
 1 PHASE  
 60 HERTZ  
 15 AMPS  
 3600 WATTS  
 MAX TEMP 2350° F

**WIRING NOTE**

NOTE: ALL WIRES TO BE TYPE SEW/SF2, #14 AWG MINIMUM UNLESS NOTED

UL/CUL LISTED

|                       |  |  |  |                 |            |
|-----------------------|--|--|--|-----------------|------------|
| COMMENTS              | PARAGON INDUSTRIES<br>2011 SOUTH TOWN EAST BLVD<br>MESQUITE, TEXAS 75149 | <b>PRODUCT DESCRIPTION</b>                                   |  | <b>PART NO.</b> | <b>REV</b> |
|                       |  | 7 SIDES, 13.5" DIA, 13.25" DP<br>240V, 1PH, 60HZ, 15A, 3600W |  | SNF663          | -          |
| <b>WIRING DIAGRAM</b> |  |  |  |                 |            |