


POWER REQS  
 240 VOLTS  
 1 PHASE  
 60 HERTZ  
 45 AMPS  
 10800 WATTS  
 MAX TEMP 2350° F

PY50  
 TYPE K 1/C

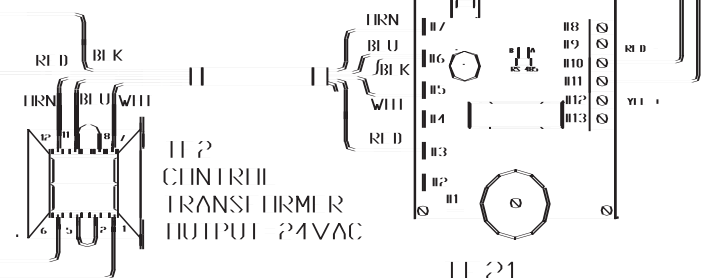

H21  
 DTC 1000C

ITEM ORDER ELEMENTS, SPECIFY DESCRIPTION	QTY	LOC
ITEM 2431B	2	TOP&BOT
ITEM 243M	4	MIDDLE

1/2 AMP USE  
 WIRING NUTS  
 ALL WIRES #14 AWG,  
 TYPE SI W/STP MINIMUM  
 UNLESS OTHERWISE NOTED

UL/CUL LISTED

COMMENTS

PARAGIN INDUSTRIES  
 2011 SOUTH HAVEN EAST BLVD  
 MISSOURI, MO 63149

PRODUCT DESCRIPTION  
 10 SLOTS, 22.5" DIA, 29" DP  
 240V, 1PH, 60HZ, 45A, 10800W

PART NO. INI 243  
 WIRING DIAGRAM

CAUTION  
 TO PREVENT CONTINUED  
 RISK OF ELECTRICAL SHOCK,  
 CUSTOMER'S POWER  
 SUPPLY MUST BE  
 PROPERLY GROUNDING.  
 NOTE: GROUNDING SCREWS  
 TO HAVE A GREEN COLORED  
 STRIP AND/OR BLACK AND  
 NOT SUBSTITUTED. USE #100S.  
 NOTE: THE SURFACE OF THE  
 INSULATED WIRES MARKED (X)  
 TO BE COLORED GREEN WITH  
 OR WITHOUT THE OR MORE  
 YELLOW STRIPS.