

WIRING NOTE


ALL WIRES #14 AWG,
TYPE SEW/SF2 MINIMUM
UNLESS OTHERWISE NOTED

CAUTION

TO PROVIDE CONTINUED
PROTECTION AGAINST THE
RISK OF ELECTRIC SHOCK,
CUSTOMER'S POWER
SUPPLY MUST BE
PROPERLY GROUNDED.

NOTE: GROUNDING SCREW
TO HAVE A GREEN COLORED
SLOTTED AND/OR HEX HEAD
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE
INSULATED WIRES MARKED ⊗
TO BE COLORED GREEN, WITH
OR WITHOUT ONE OR MORE
YELLOW STRIPES.

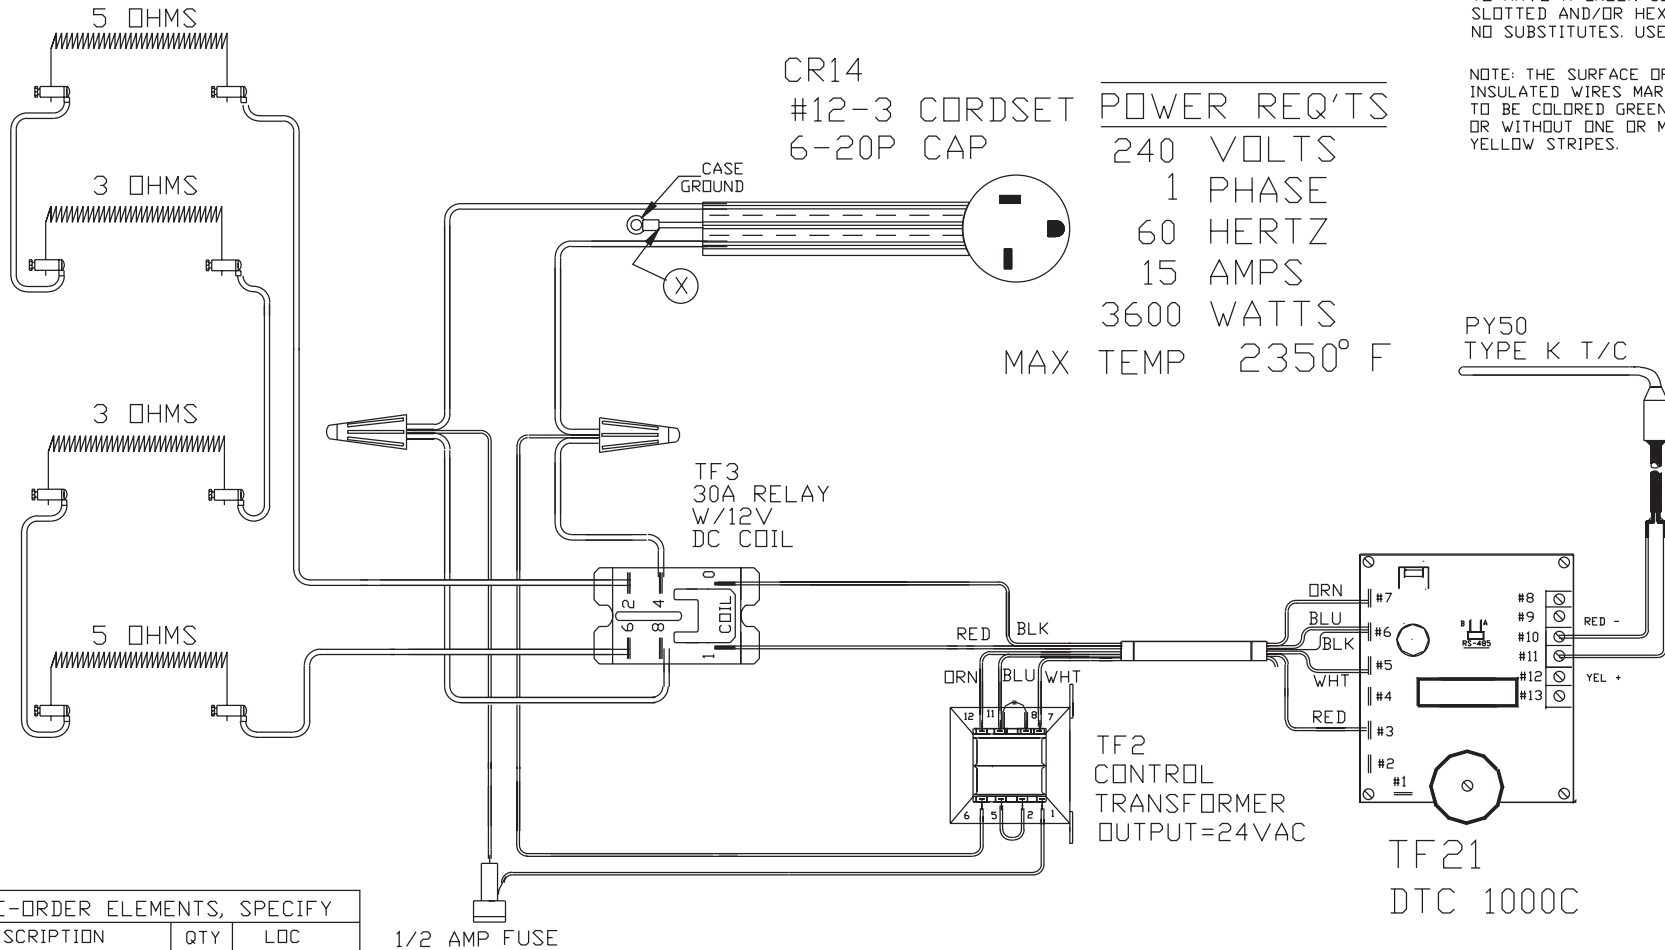

<u>POWER REQ'TS</u>	
240	VOLTS
1	PHASE
60	HERTZ
15	AMPS
3600	WATTS
MAX	TEMP 2350° F

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELTNF663TB	2	TOP&BOT
ELTNF663M	2	MID

UL/CUL LISTED

COMMENTS

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

PRODUCT DESCRIPTION
7 SIDES, 13.5" DIA, 13.25" DP
240V, 1PH, 60HZ, 15A, 3600W

PART NO.	TNF663	REV	-
WIRING DIAGRAM			