

**CAUTION**

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

**WIRING NOTE**

ALL WIRES #14 AWG, TYPE SEW/SF2 MINIMUM UNLESS OTHERWISE NOTED


CR4  
#14-3 CORDSET  
5-15P CAP

**POWER REQ'TS**

120 VOLTS  
1 PHASE  
60 HERTZ  
12 AMPS  
1440 WATTS

MAX TEMP 2300° F

PY50  
TYPE K T/C

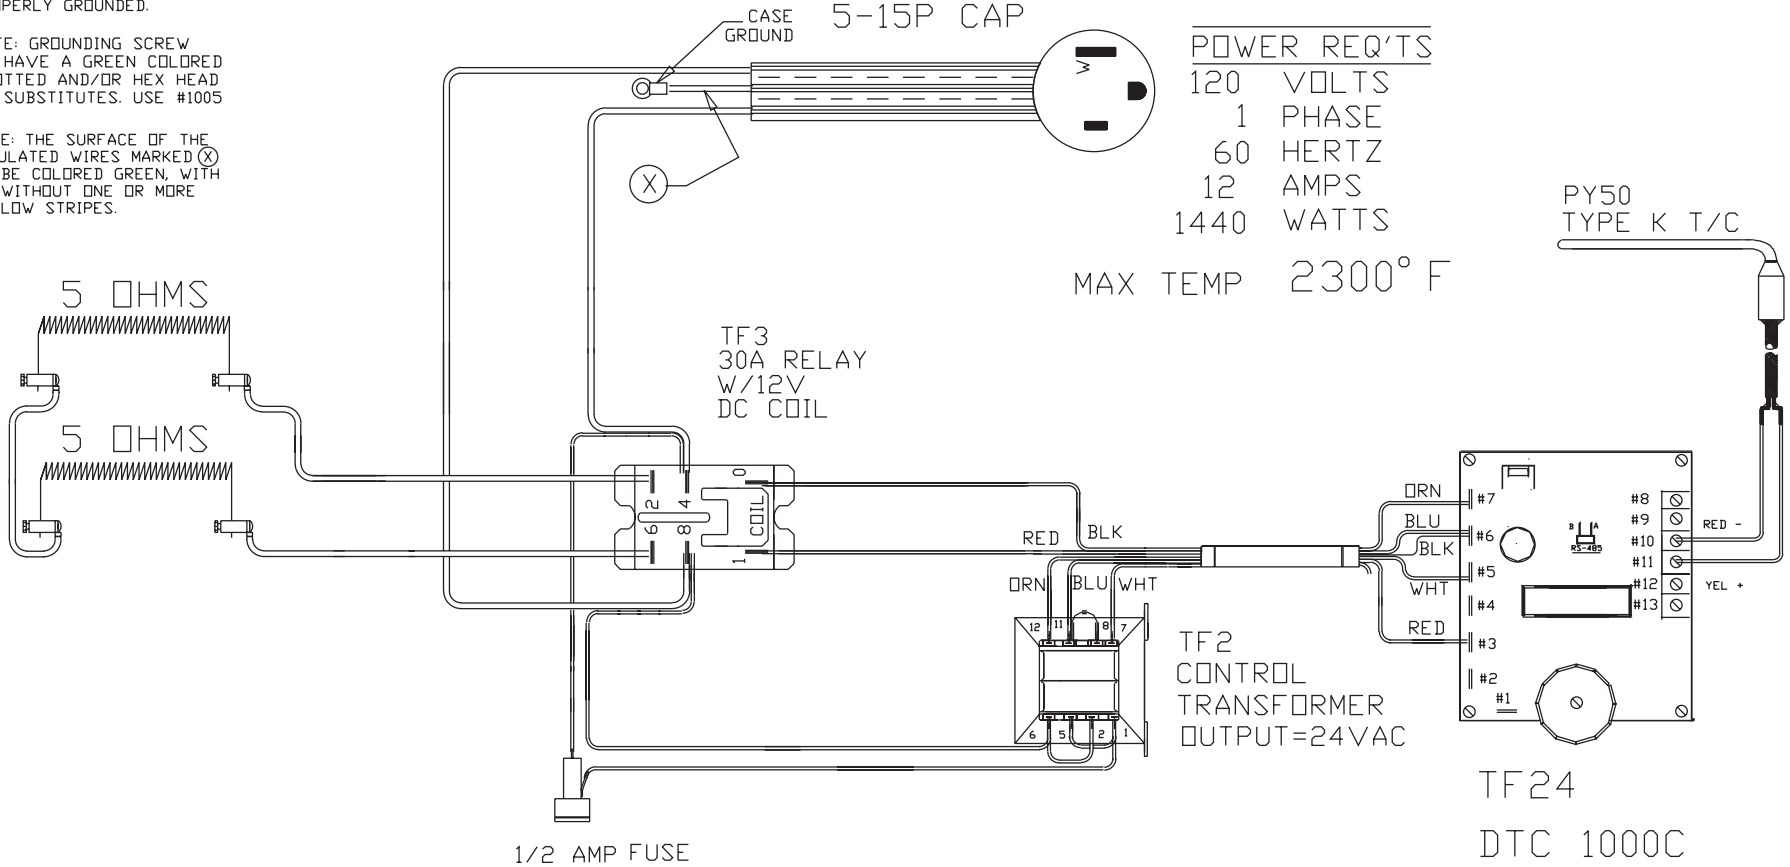

TO RE-ORDER ELEMENTS, SPECIFY

DESCRIPTION	QTY	LOC
ELQ11	2	SIDES

TF24  
DTC 1000C

UL/CUL LISTED

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	PRODUCT DESCRIPTION 5.75"W, 6.25"H, 6"DP 120V, 1PH, 60HZ, 12A, 1440W	PART NO.	TNFQ11A	REV	-
			WIRING DIAGRAM			