




Paragon Industries, L.P.  
 2011 South Town East Blvd.  
 Mesquite, Texas  
 75149-1122  
 972-288-7557

www.paragonweb.com  
 info@paragonweb.com

# F-240

- Elements in the walls, protected in dropped, recessed grooves
- 3" insulating refractory firebricks throughout the firing chamber
- Optional door safety switch
- Long-life electrical system
- Coated roof for extra durability
- Precisely balanced spring-loaded vertical-drop door
- 2 - 4" x 7 1/2" punty rod doors
- Slide out mandrel holder
- Double gaskets under the 2" thick punty rod doors
- Fast-response, exposed-tip 1/4" wide thermocouple
- Rare earth magnets hold the punty rod doors open or closed.
- Deluxe mercury relay
- TUV tested to UL and CSA standards
- On/off switch
- Safety pilot light
- Shipped in a wooden crate

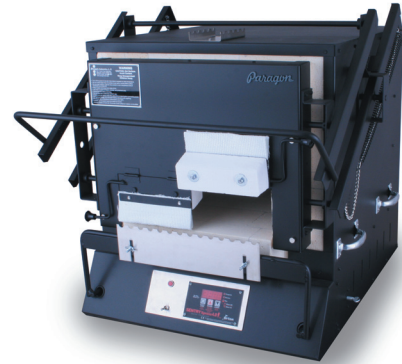

## Dimensions & Specifications

<b>Max Temp °F</b>	1700°
<b>Cubic Feet</b>	2.4
<b>Firing Chamber</b>	18"W x 18"D x 13"H
<b>Uncrated Outside Dimensions</b>	29"W x 34 1/2"D x 29"H
<b>Shipping Wt., Kiln</b>	346
<b>Doorway Clearance Needed</b>	29
<b>Volts</b>	240
<b>Amps</b>	20
<b>Watts</b>	4,800
<b>Circuit: Copper Wire Size</b>	12
<b>Circuit: Fuse</b>	20
<b>NEMA Config.</b>	6-20R