


PAL NOTE

NOTE: INSTALL PALLADIUM SWITCH 180° FROM POSITION SHOWN TO ENSURE PROPER ALIGNMENT OF KNOB.

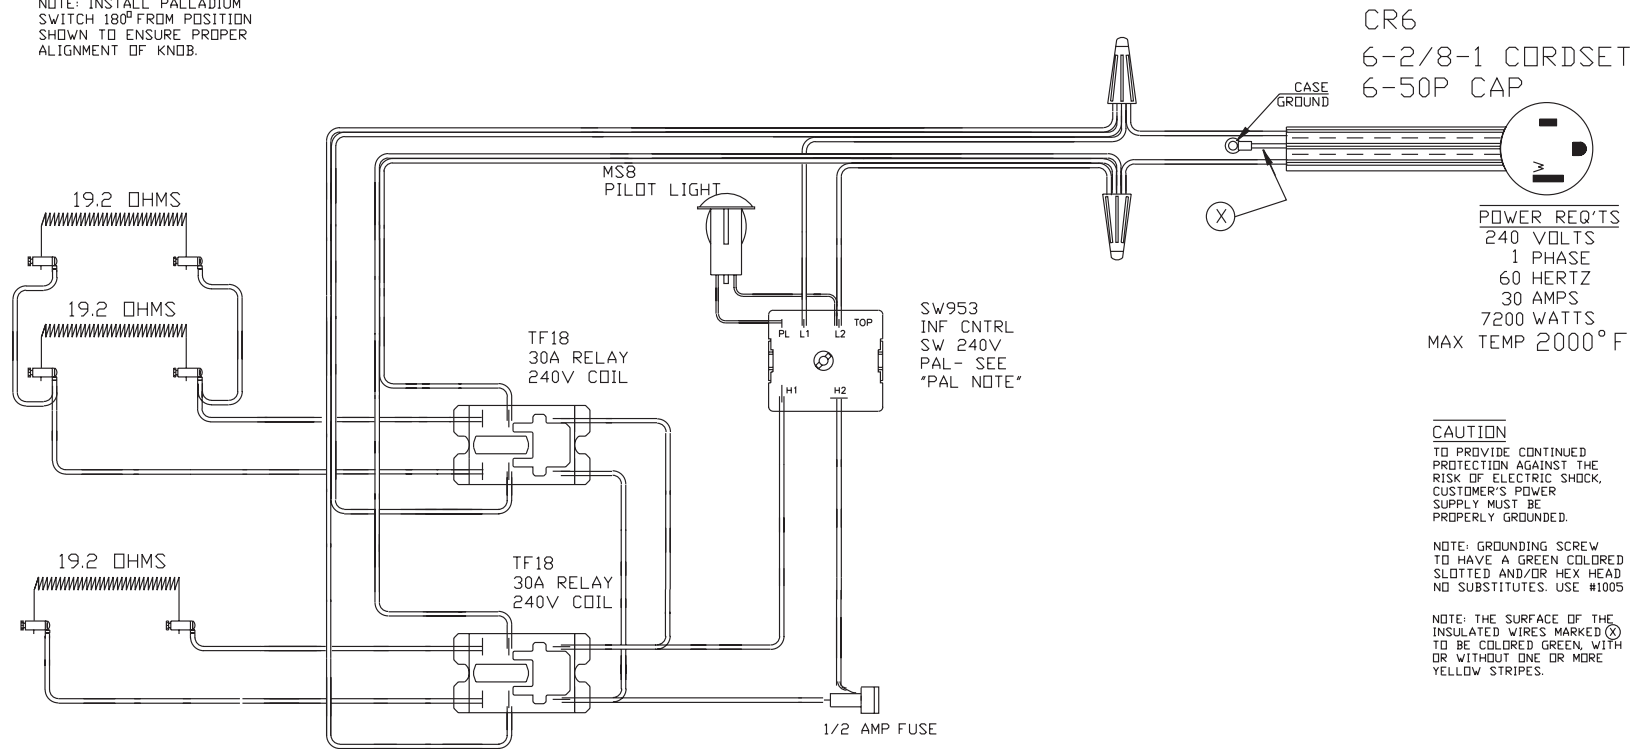

POWER REQ'TS
 240 VOLTS
 1 PHASE
 60 HERTZ
 30 AMPS
 7200 WATTS
 MAX TEMP 2000° F

CAUTION
 TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

WIRING NOTE

ALL WIRES #14 AWG, TYPE SEW/SF2 MINIMUM UNLESS OTHERWISE NOTED

UL/CUL LISTED

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	PRODUCT DESCRIPTION 25"W, 15"H, 23"DP 240V, 1PH, 60HZ, 37.5A, 9000W	PART NO.	REV
			GL24A	-
			WIRING DIAGRAM	