


TOP

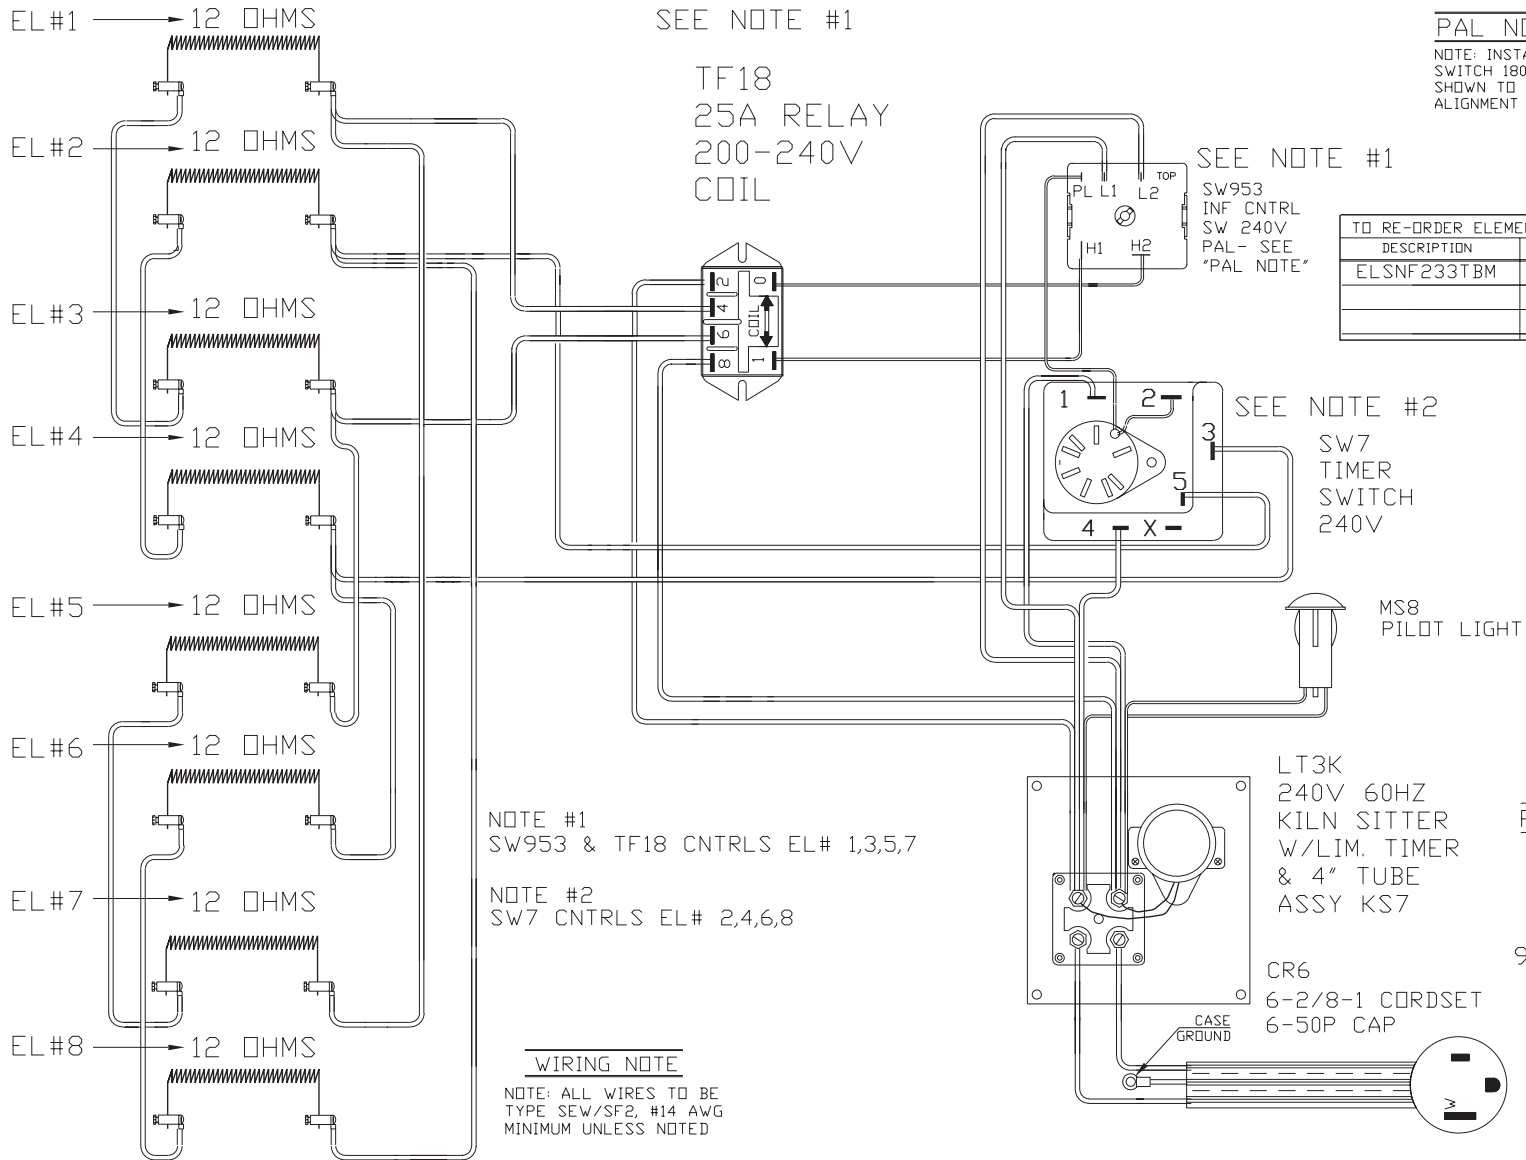

SEE NOTE #1  
 TF18  
 25A RELAY  
 200-240V  
 COIL

PAL NOTE

NOTE: INSTALL PALLADIUM SWITCH 180° FROM POSITION SHOWN TO ENSURE PROPER ALIGNMENT OF KNOB.

SEE NOTE #1

SW953  
 INF CNTRL  
 SW 240V  
 PAL- SEE  
 'PAL NOTE'

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELSNF233TBM	8	TOP, BOT & MID

SEE NOTE #2

SW7  
 TIMER  
 SWITCH  
 240V

MS8  
 PILOT LIGHT

LT3K  
 240V 60HZ  
 KILN SITTER  
 W/LIM. TIMER  
 & 4" TUBE  
 ASSY KS7

POWER REQ'TS	
240 VOLTS	1 PHASE
60 HERTZ	40 AMPS
9600 WATTS	

CR6  
 6-2/8-1 CORDSET  
 6-50P CAP

NOTE #1  
 SW953 & TF18 CNTRLS EL# 1,3,5,7

NOTE #2  
 SW7 CNTRLS EL# 2,4,6,8

WIRING NOTE

NOTE: ALL WIRES TO BE TYPE SEW/SF2, #14 AWG MINIMUM UNLESS NOTED

MAX TEMP 2350° F

COMMENTS

PARAGON INDUSTRIES  
 2011 SOUTH TOWN EAST BLVD  
 MESQUITE, TEXAS 75149

PRODUCT DESCRIPTION  
 10 SIDES 22.5" DIA, 22.25" DP  
 240V, 1PH, 60HZ, 40A, 9600W

PART NO. SNF233

WIRING DIAGRAM

REV -